

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 February 2003 (13.02.2003)


PCT

(10) International Publication Number  
**WO 03/011099 A1**

- (51) International Patent Classification<sup>7</sup>: A47L 11/03, (72) Inventors: FIELD, Bruce, F.; 501 Theodore Wirth Parkway, Golden Valley, MN 55422 (US). JOYNT, Daniel, L.; 19070 Lyons Street, Wyoming, MN 55092 (US). JOHNSON, Jeffrey, A.; 2163 Stanford Avenue, St. Paul, MN 55105 (US). KRUEGER, Joseph, K.; 337 Madison Avenue North, Hopkins, MN 55327 (US). CHRISTENSEN, Bryan, L.; 18651 South Diamond Lake Road, Dayton, MN 55327 (US).
- (21) International Application Number: PCT/US02/23758
- (22) International Filing Date: 26 July 2002 (26.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/308,773 30 July 2001 (30.07.2001) US  
10/026,411 21 December 2001 (21.12.2001) US  
10/152,549 21 May 2002 (21.05.2002) US
- (71) Applicant: TENNANT COMPANY [US/US]; 701 North Lilac Drive #29, P.O. Box 1452, Minneapolis, MN 55440 (US).
- (74) Agents: KAUL, Brian, D. et al.; Westman, Champlin & Kelly, P.A., Suite 1600 - International Centre, 900 Second Avenue South, Minneapolis, MN 55402-3319 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,

[Continued on next page]

(54) Title: CLEANER CARTRIDGE

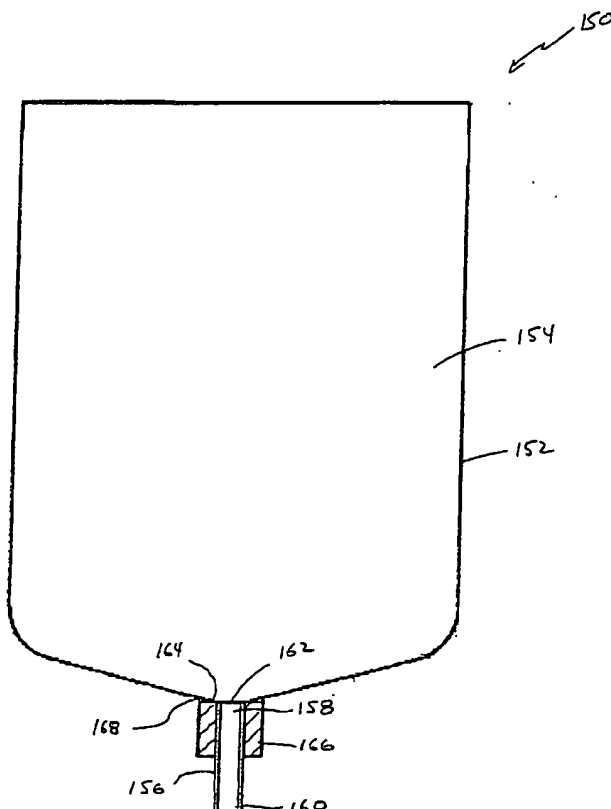

(57) Abstract: A cleaner cartridge (150) includes a container (152) having an interior cavity (154), in which cleaning agent can be stored. A first end (158) of conduit (156) is fluidically coupled to the interior cavity. A second end (160) of the conduit is connectable to a chemical dispenser (60).

WO 03/011099 A1

BEST AVAILABLE COPY



MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,  
SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- with amended claims

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

-1-

**CLEANER CARTRIDGE**FIELD OF THE INVENTION

The present invention relates generally to hard floor surface cleaners and, more particularly, to a cleaner cartridge for use in a hard floor surface cleaner to contain a supply of cleaning agent that is used in a cleaning liquid dispensing system.

BACKGROUND OF THE INVENTION

Hard floor surface cleaners are widely used to clean the floors of industrial and commercial buildings. They range in size from a small model that is controlled by an operator walking behind the cleaner and can clean a path ranging from 15 inches to 36 inches wide, to a large model that is controlled by an operator riding on the machine and can clean a path as wide as 5 feet. These hard floor surface cleaners include motorized drive wheels, a solution tank to hold cleaning solution and a recovery tank to hold soiled cleaning solution recovered from the floor being scrubbed. The cleaning solution, which typically includes a cleaning agent mixed with water, is applied to the hard floor surface adjacent a scrub head. The scrub head generally contains one or more motorized scrubbing brushes attached either in front of, under, or behind the vehicle. These scrubbing brushes typically rotate to provide the desired scrubbing action. The soiled cleaning solution is then recovered using a solution

-2-

recovery system, which returns the soiled cleaning solution to the recovery tank.

The cleaning solution is typically gravity fed to the scrub head at a rate that varies in response to the volume of cleaning solution contained in the solution tank. As the volume of cleaning solution contained in the solution tank decreases, the rate at which the cleaning solution is fed to the scrub head decreases. For example, a typical hard floor surface cleaner having a 32 inch wide scrubbing swath applies the cleaning solution to the hard floor surface at a rate that varies from between approximately 1.0 gallons per minute (GPM) when the solution tank is full to a rate of 0.5 GPM when the tank contains a low volume of cleaning solution.

One problem with prior art hard floor surface cleaners has been their limited operational runtime. This is primarily due to their limited solution tank volume and the high cleaning solution flow rates. A typical hard floor surface cleaner having a 32 inch cleaning swath typically has an operational runtime based on solution capacity of approximately 30-40 minutes, for example.

One possible solution to the short run runtime for these cleaners is to increase the size of the solution and recovery tanks. Unfortunately, such an increase in cleaning solution capacity typically necessitates modifications to the frame and other components of the hard floor surface cleaner, which

-3-

results in additional weight and higher energy requirements for the device. For most applications, these modifications are impractical.

The high volume flow rate of cleaning solution  
5 has been generally desired to provide complete wetting of the floor being cleaned. Unfortunately, the lack of control of the volume flow rate of the cleaning solution results in an excessive amount of cleaning solution being distributed to the floor,  
10 when, for example, the solution tank is full. The high volume flow rate of the cleaning solution of prior art hard floor surface cleaners also results in extended downtime. The long downtime periods are generally due to the numerous disposals of soiled  
15 cleaning solution. Additional downtime results from having to refill the solution tank with cleaning solution, which involves manually filling the solution tank with water and mixing in the cleaning agent. Additionally, where the cleaning process  
20 removes harmful or hazardous chemicals, the disposal of the soiled cleaning solution may require special handling and/or additional costs to ensure that it is disposed of properly. As a result, the large volumes of cleaning solution that are used by prior art hard  
25 floor surface cleaners reduce the efficiency at which a cleaning job can be performed.

Consequently, prior art hard floor surface cleaners suffer from several deficiencies that lead to inefficient floor cleaning operations. Most of

-4-

these deficiencies stem from the poor cleaning solution flow rate control and the high volume flow rate of the cleaning solution that is applied to the hard floor surface. Additional problems can result from having to manually prepare the cleaning solution, such as mixing too much or too little cleaning agent in the water.

#### SUMMARY OF THE INVENTION

The present invention is directed to a cleaner cartridge for use in a hard floor surface cleaner. The cleaner cartridge can be used to contain a supply of cleaning agent that dispensed by a chemical dispenser of a cleaning liquid dispensing system to automate the mixing of a primary cleaning liquid component, such as water, with the cleaning agent to form cleaning liquid that is applied to the hard floor surface. This allows for more efficient use of the cleaning agent and primary cleaning liquid component, longer operational runtime and shorter downtime. The cleaner cartridge includes a container having an interior cavity, in which the cleaning agent can be stored. A first end of conduit is fluidically coupled to the interior cavity. A second end of the conduit is connectable to a chemical dispenser.

Other features and benefits that characterize embodiments of the present invention will be apparent upon reading the following detailed description and the review of the associated drawings.

-5-

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1 and 2 are simplified side elevation views of hard floor surface cleaners in accordance with various embodiments of the present invention.

FIG. 3 is a schematic diagram illustrating a chemical dispenser of a cleaning liquid dispensing system in accordance with embodiments of the invention.

FIG. 4 is a front elevation view of a primary cleaning liquid component dispenser in accordance with an embodiment of the invention.

FIG. 5 is a schematic diagram of a flow restriction member in accordance with an embodiment of the invention.

FIGS. 6-8 are front elevation views of chemical dispensers and other components of a cleaning liquid dispensing system in accordance with various embodiments of the invention.

FIG. 9 is a front elevation view in partial cross-section of a flow restriction member coupled to a fluid mixing member in accordance with an embodiment of the invention.

FIG. 10 is a front elevation view of a chemical dispenser of a cleaning liquid dispensing system in accordance with an embodiment of the invention.

FIG. 11 is a schematic diagram of a cleaning liquid dispensing system utilizing multiple chemical

-6-

dispensers in accordance with an embodiment of the invention.

FIG. 12 is a front elevation view and partial cross-section of a cleaner cartridge in accordance with an embodiment of the invention.

FIG. 13 is a front elevation view of a cleaner cartridge illustrating various embodiments of the invention.

FIG. 14 is a perspective view of a housing of a cleaner cartridge in accordance with embodiments of the invention.

FIG. 15 is a perspective view of a cleaner cartridge installed on a cartridge receiver in accordance with an embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 illustrates a hard floor surface cleaner 10 in which embodiments of the present invention can be used. The illustrated cleaner 10 is a walk-behind cleaner used to clean hard floor surfaces, such as concrete, tile, vinyl, terrazzo, etc. Alternatively, cleaner 10 can be a ride-on or towed-behind cleaner performing a scrubbing operation as described herein. Cleaner 10 may include electrical motors powered through an on-board power source, such as batteries, or through an electrical cord. Alternatively, an internal combustion engine system could be used either alone, or in combination with, the electric motors. Cleaner 10 generally includes a recovery tank 12, and a lid 14. Lid 14 is attached along one side



-7-

of the recovery tank 12 by hinges (not shown) so that lid 14 can be pivoted up to provide access to the interior of tank 12. Cleaner 10 also includes a tank 18 for containing cleaning liquid or a primary  
5 cleaning liquid component that is applied to the hard floor surface during cleaning operations.

A scrub head 20 includes a scrubbing member 22, shrouds 24, and a scrubbing member drive 26. Scrubbing member 22 may be one or more brushes, such  
10 as bristle brushes, pad scrubbers, or other hard floor surface scrubbing elements. Drive 26 includes one or more electric motors to rotate the scrubbing member 22. Scrubbing member 22 may be a disc-type scrub brush rotating about a generally vertical axis  
15 of rotation relative to the hard floor surface. Alternatively, scrubbing member 22 may be a cylindrical-type scrub brush rotating about a generally horizontal axis of rotation relative to the hard floor surface. Drive 26 may also oscillate  
20 scrubbing member 22. Scrub head 20 is attached to cleaner 10 such that scrub head 20 can be moved between a lowered cleaning position and a raised travelling position.

A machine frame 27 supports recovery tank 12 on  
25 wheels 28 and castors 29. Details of the frame are shown and described in U.S. Patent Number 5,611,105, the disclosure of which is incorporated herein by reference. Wheels 28 are preferably driven by a motor and transaxle assembly shown schematically at 30. The

-8-

rear of the frame carries a linkage 31 to which a fluid recovery device 32 is attached. In the embodiment of FIG. 1, the fluid recovery device 32 includes a vacuum squeegee 34 and vacuum communication with an inlet chamber in recovery tank 12 through a hose 36. The bottom of the inlet chamber is provided with a drain 40 with a drain hose 42 connected to it.

FIG. 2 illustrates hard floor surface cleaner 10 utilizing an alternative soiled solution recovery device 32. In accordance with this embodiment, the soiled solution recovery device 32 includes a non-vacuumized mechanical device for lifting the soiled solution away from the floor surface and conveying the soiled solution toward a collection tank or receptacle 44. The non-vacuumized mechanical device includes a plurality of wiping medium such as pliable material elements 46 which are rotated into contact with the floor surface to engage and lift the soiled solution from the floor surface. The pliable material elements 46 may be of an absorbent material. The pliable material elements 46 convey the solution to the collection receptacle 44. Solution captured on the pliable elements 46 may be removed via a mechanical action, such as through a shearing device or a squeezing device. In the embodiment of FIG. 2, the mechanical action used to remove soiled solution from the pliable material elements 46 is a scraper bar 48 which engages the

-9-

pliable material elements 46 to release the soiled solution. Alternative mechanical devices, structures, or systems may be used to convey the soiled solution from the floor surface toward a collection  
5 receptacle.

Cleaner 10 can include a battery compartment 50 in which batteries 52 reside as shown in FIG. 1. Batteries 52 provide power to drive motors 26, vacuum fan 54, and other electrical components of cleaner  
10 10. Vacuum fan 54 is mounted in the lid 14. A control unit 56 mounted on the rear of the body of cleaner 10 includes steering control handles 58 and operating controls and gages for cleaner 10. Additional aspects of automatic hard floor surface cleaners are  
15 disclosed in U.S. Patent Numbers 5,483,718; 5,515,568; and 5,566,422, each of which are incorporated herein by reference.

The present invention is directed to a chemical dispenser 60, shown schematically in FIG. 3, for use  
20 in a hard floor surface cleaner, such as cleaner 10, that can provide a substantially constant flow of cleaning agent. Chemical dispenser 60 can be formed as a component of a cleaning liquid dispensing system 62, which provides a substantially constant flow of  
25 cleaning liquid 64 to a fluid distributor 66, scrub head 20 (FIG. 1) adjacent the hard floor surface, or other cleaner component. The cleaning liquid generally includes a combination of a primary cleaning liquid component, dispensed by a primary

-10-

cleaning liquid component dispenser 68 and the cleaning agent dispensed from chemical dispenser 60.

Chemical dispenser 60 generally includes a supply of cleaning agent 70 and a flow control device  
5 72. Flow control device 72 is fluidically coupled to the cleaning agent 70 and includes a substantially constant output flow 74 of cleaning agent having a flow rate that is substantially independent of the volume of cleaning agent contained in the supply 70.  
10 In accordance with one embodiment, chemical dispenser 60 includes a fluid mixing member 76 that receives the output flow 74 of cleaning agent and an output flow 78 of primary cleaning liquid component from dispenser 68. Fluid mixing member 76 combines the  
15 flows of cleaning agent and primary cleaning liquid component and produces the output flow 64 of cleaning liquid.

Output flow 64 of cleaning liquid is preferably maintained at a low volume flow rate that is desired  
20 for the floor cleaning operation. This near constant low volume flow rate of output flow 64 of cleaning liquid provides significant improvements over the prior art gravity-fed fluid dispensing systems, which have a varying flow rate of cleaning liquid and must  
25 be configured to ensure that the minimum flow rate of cleaning liquid is sufficient to perform the cleaning operation. Unfortunately, this results in much higher flow rates, and, possibly, much lower flow rates than desired. Accordingly, when the desired flow rate of

-11-

cleaning liquid is 0.5 GPM, prior art flow cleaners will provide flow rates that substantially exceed the desired flow rate, whereas cleaning liquid dispenser 62 of the present invention can provide a near  
5 constant flow rate of 0.5 GPM.

In accordance with embodiments of the invention, the output flow 64 of cleaning liquid is preferably limited to approximately 0.2 GPM. This leads to longer operational runtimes, shorter downtime, and  
10 faster floor cleaning operations. Furthermore, cleaning liquid expenses are reduced since less is used for a given job. Also, this reduction in cleaning liquid reduces time spent disposing liquid waste and refilling the cleaner with cleaning liquid.  
15 Other advantages, such as faster floor drying, can also be realized by hard floor surface cleaners utilizing cleaning liquid dispensing system 62 of the present invention to further improve the efficiency of floor cleaning operations.

20 In accordance with this embodiment, cleaning agent 70 is in a concentrated form, preferably 38% solids, such that the desired volume flow rate of flow 74 of cleaning agent is approximately 10 cubic centimeters or less per minute. In accordance with a  
25 preferred embodiment, the mixing ratio of primary cleaning liquid component to cleaning agent is approximately 1000:1. However, other mixing ratios can be used as well. As a result, the volume flow rate of cleaning agent is preferably 0.1% that of the

-12-

primary cleaning liquid component. The cleaning agent preferably includes an anionic surfactant, a non-anionic surfactant, a cationic surfactant, or a combination thereof. A particularly preferred  
5 surfactant is DeTeric Cp-Na-38 manufactured by DeForest Enterprises, Inc. of Boca Raton, Florida. Alternative cleaning agents may include one or more surfactants, builders, solvents, or other components. The primary cleaning liquid component is preferably  
10 water that is stored, for example, in tank 18 shown in FIG. 1.

Primary cleaning liquid component dispenser 68 generally includes a supply of primary cleaning liquid component 80 and a primary flow control device  
15 82. The supply of primary cleaning liquid component 80 can be contained in tank 18 (FIG. 1), for example. Primary flow control device 82 is fluidically coupled to the supply of primary cleaning liquid component 80 and produces the substantially constant output flow  
20 78 of primary cleaning liquid component. Alternatively, as shown at 82' primary flow control device, or components thereof, can be positioned downstream of fluid mixing member 76 to control the flow of cleaning liquid 64.

25 In accordance with one embodiment of the invention, primary flow control device 82 includes a pump 84 and a flow restriction member 86, as shown in FIG. 4. Pump 84 includes an inlet 88 that receives the supply of primary cleaning liquid component

-13-

through conduit section 90A. Pump 84 also includes an outlet 92 that is maintained at a high pressure. The output flow 78 of primary cleaning liquid component (or flow 64 of cleaning liquid) is provided through outlet 92 and through conduit section 90B. In accordance with one embodiment, the pressure at outlet 92 is held substantially constant at approximately 40 pounds per square inch (psi). Pump 84 is preferably a diaphragm pump, such as diaphragm pump model number 8006-543-250 manufactured by Shurflo of Garden Grove, California. Other types of pumps can also be used.

Flow restriction member 86 is generally positioned in line with conduit sections 90B and 62C and the flow of primary cleaning liquid component 78. Alternatively, flow restriction member 86 could be positioned downstream of fluid mixing member 76 (as indicated by dashed box 82' of FIG. 3) and in line with the flow of cleaning liquid 64. Flow restriction member 86 includes an upstream high pressure side 94 and a downstream low pressure side 96 as shown in FIG. 4. The pressure drop across flow restriction member 86 between high pressure side 94 and low pressure side 96 restricts the flow of fluid therethrough to provide the desired volume flow rate. Multiple flow restriction members 86 can be positioned in series to provide the desired pressure drop in the fluid flow.

-14-

In accordance with one embodiment, flow restriction member 86 is a metering orifice or orifice plate 98, shown schematically in FIG. 5. Orifice plate 98 includes an orifice 100 through  
5 which the output flow 78 of primary cleaning liquid component (or flow 64 of cleaning liquid) flows. Plate 98 is installed in conduit 62, the inner diameter of which is indicated by dashed line 102, such that the fluid is forced to flow through orifice  
10 100. This produces the pressure drop as described above and restricts the output flow 78 or 64 to the desired flow rate. In accordance with a preferred embodiment, orifice 100 of orifice plate 98 has a  
15 diameter D of 0.03 inch to provide the desired output flow of 0.2 GPM when the pressure of outlet 92 of pump 84 is at approx. 40 psi. One example of a suitable metering orifice or orifice plate 98 is part  
number CP 4916-40 manufactured by Spraying Systems Co. of Wheaton, Illinois. Other orifice plates or  
20 metering orifice configurations are possible as well, such as by providing multiple orifices in the plate 98 or other flow restriction configurations.

In order to maintain the desired distribution of cleaning liquid to the hard floor surface during  
25 cleaning operations, the pressure at output 92 of pump 84 can be varied depending upon the velocity of cleaner 10. Thus, at slower speeds, the pressure at outlet 92 can be reduced to lower the output flow 78 or 64 and, thus, the volume of liquid that is applied



-15-

to the hard floor surface. Likewise, as the velocity of the cleaner 10 is increased, the pressure at outlet 92 can be increased to increase the fluid flow and maintain the desired wetting of the hard floor surface with cleaning liquid.

Referring now to FIGS. 3 and 6-10, a more detailed discussion of chemical dispenser 60 will be provided. As discussed above, chemical dispenser 60 generally includes supply of cleaning agent 70 and flow control device 72 shown in FIG. 3. The supply of cleaning agent 70 is preferably stored in a disposable container or cleaner cartridge and received at an inlet 106 of flow control device 72. Flow control device 72 operates to provide a substantially constant output flow 74 of cleaning agent to a fluid mixing member 76. Fluid mixing member 76 combines the flows of cleaning agent and primary cleaning liquid component and produces an output flow 64 of cleaning liquid that can be provided to fluid distributor 66, scrub head 20, or other cleaner component.

Fluid mixing member 76, best shown in FIG. 9, is generally depicted as a T-coupling having inlets 108 and 110 that respectively receive the flows 74 and 78 of cleaning agent and primary cleaning liquid component. The flow of cleaning liquid 64 is then provided at an outlet 112. Other types of fluid mixing components can be used as well. Fluid mixing member 76 can be positioned either upstream or

-16-

downstream of primary flow control device 82 or, more particularly, pump 84. It is generally preferable, however, to position fluid mixing member downstream of pump 84 due to the substantially constant pressure in the conduit at that location which results in a more constant flow 74 of cleaning agent.

In accordance with one embodiment, flow control device 72 includes a pump 114 that receives cleaning agent from supply 70 and drives the flow 74 of cleaning agent through conduit 116 to fluid mixing member 76 located either upstream or downstream of primary flow control device 82, as shown in FIGS. 6 and 7. The flow 74 of cleaning agent is generated substantially independently of the volume of cleaning agent in supply 70. A check valve (not shown) can be installed in line with conduit section 118 to prevent the back flow of cleaning agent and primary cleaning liquid component to tank 18 when fluid mixing member 76 is in the upstream location. Pump 114 is preferably a solenoid pump, such as pump number ET200BRHP sold through Farmington Engineering of Madison, CT and manufactured by CEME. Another suitable pump is the SV 653 metering pump manufactured by Valcor Scientific. Other types of pumps can also be used for pump 114.

A controller 120 controls the operations of pump 114 through a control signal 122. One suitable controller is part number QRS2211C (either 24V or 36V) sold by Infitec Inc. or Syracuse, NY. In

-17-

accordance with one embodiment, signal 122 is a pulsed signal that provides power relative to ground (not shown) and controls the duration over which the pump drives the cleaning agent through conduit 116.

5 For example, control signal 122 can turn pump 114 on for 0.1 seconds and off for 2.75 seconds to produce the desired low volume output flow 74 of concentrated cleaning agent.

In accordance with another embodiment of the  
10 invention, flow control device 72 includes a flow restriction member 124 having an upstream high pressure inlet 126 and a low pressure outlet 128, as shown in FIG. 8. Inlet 126 of flow restriction member 124 is fluidically coupled to supply of cleaning  
15 agent 70 through conduit section 130 and outlet 128 is fluidically coupled to inlet 108 of fluid mixing member 76. Fluid mixing member 76 is positioned upstream of pump 84 and receives a flow of primary cleaning liquid component at inlet 110. A vacuum  
20 generating component 132, such as a metering orifice or orifice plate, in combination with pump 84 is provided in line with the flow of primary cleaning liquid component to produce a low pressure region, preferably at approximately -1.0 psi, adjacent outlet  
25 128 and fluid mixing member 76. This vacuum produces a pressure gradient from the inlet 126 to outlet 128 of flow restriction member 124 that results in a substantially constant flow 74 (FIG. 3) of cleaning agent through flow restriction member 124. At the

-18-

preferred low flow rate of cleaning agent, the flow 74 of cleaning agent through flow restriction member 124 remains substantially constant even as the volume of supply 70 changes.

5 Flow restriction member 124 can include a labyrinthine fluid flow path to provide the desired flow restriction, in accordance with one embodiment of the invention. The labyrinthine path is preferably formed by one or more drip irrigators 134, as shown  
10 in FIG. 9. One such preferred drip irrigator suitable for use in flow restriction member 124 is described in U.S. Patent No. 5,031,837 and available as part number R108C manufactured by Raindrip of Woodland Hills, CA. Preferably, three drip irrigators 134 are  
15 placed in series and are coupled together with tubing sections 136 and 138. A surround 140 can cover the drip irrigators 134 and tubing sections 136 and 138. Outlet 128 couples to inlet 108 of fluid mixing member 76 or a section of tubing coupled to fluid  
20 mixing member 76. Inlet 126 couples to conduit 130 (FIG. 8) for fluid communication with supply 70. Other suitable drip irrigators or similar flow restricting devices can also be used to form flow restriction member 124.

25 In accordance with another embodiment of the invention, flow control device 72 includes both pump 114 and flow restriction member 124, as shown in FIG. 10. Pump 114 and flow restriction member 124 are placed in line with the supply of cleaning agent 70

-19-

and fluid mixing member 76. Pump 114 drives the cleaning agent, in response to a control signal 122 from controller 120, through flow restriction member 124. Thus, pump 114 generates the desired pressure at inlet 126 of flow restriction member that is higher than that at outlet 128 or fluid mixing member 76 to produce the pressure gradient across flow restriction member 124 and drive the flow 74 of cleaning agent therethrough at a substantially constant flow rate.

10 In accordance with an alternative embodiment, flow restriction member 124 can be placed in line with pump 114, shown in FIG. 6, and couple to fluid mixing member 76 positioned downstream of pump 84.

Cleaning liquid dispenser 62 can also be configured to use multiple chemical dispensers 60, each of which is configured to dispense a respective cleaning agent or chemical for mixing with a flow of primary cleaning liquid component from dispenser 68. In the example shown in FIG. 11, two chemical dispensers 60A and 60B are used to respectively dispense flows 74A and 74B of cleaning agents 70A and 70B using flow control devices 72A and 72B. The flows 74A and 74B are provided to fluid mixing member 76 for mixing with flow 78 of primary cleaning liquid component from dispenser 68. Additional chemical dispensers 60 dispensing other cleaning agents or chemicals could be added. This arrangement allows cleaner 10 to dispense a different type of cleaning agent or other chemical as desired for the cleaning

-20-

operation. For example, the separate supplies 70 could contain cleaning agents having different concentrations, cleaning agents that are suitable for different types of hard floor surfaces, defoaming agents, rinsing agents, waxing agents, disinfectants, solvents, alkaline builders, or other chemicals.

Fluid mixing member 76 can be configured to mix one or more of the cleaning agents with flow 78 of primary cleaning liquid component. Fluid mixing member 76 can include a single multi-way valve or other suitable component. Fluid mixing member 76 is preferably positioned to reduce the amount of cleaning liquid that must flow through cleaner 10 before a changeover to the new cleaning agent can be completed. This is particularly important when the preferred highly concentrated cleaning agents are used and the flow rates are low. However, many other configurations are possible. For instance, several of the chemical dispensers 60, shown in FIG. 3, can be used to produce separate cleaning liquid flows. The cleaning liquid flows from the multiple chemical dispensers can then be switched using an appropriate valve to provide the desired cleaning liquid to the hard floor surface through fluid distributor 66 or other cleaner component.

Cleaning agent supply 70 is preferably contained in a disposable container or cleaner cartridge 150, as shown in FIG. 12. Cleaner cartridge 150 generally includes a container 152 having an interior cavity

-21-

154 and conduit 156. Conduit 156 includes a first end 158 that is fluidically coupled to interior cavity 154 and a second end 160 that is connectable to chemical dispenser 60. A volume of 2.8 liters, for example, of the supply of cleaning agent can preferably be contained within interior cavity 154 for dispensing to chemical dispenser 60 through conduit 156.

Container 152 is preferably a collapsible bag that is completely sealed except where connected to conduit 156. Thus, container 152 shrinks as the cleaning agent stored therein is depleted. In accordance with this embodiment, container 152 can be formed of vinyl or other suitable material. Alternatively, container 152 can take the form of a rigid container, such as a box, that includes a vent for replacing dispensed cleaning agent with air. Container 152 can be transparent or translucent to allow the cleaning agent to be viewed. Alternatively, container 152 can be formed of a material that prevents the exposure of the cleaning agent contained therein from light.

First end 158 of conduit 156 is preferably attached to container 152 such that it is flush with the inside of outlet 162. A seal 164 is formed between first end 158 and container 152 at outlet 162 to prevent cleaning agent from escaping at that junction. In accordance with one embodiment, seal 164 includes an annular neck 186 surrounding first end

-22-

158 and adjoining container 152. A weld 168 can be formed between annular neck 186 and first end 158 and container 152 to further seal the junction. Other methods for sealing the junction of first end 158 and  
5 container 152 can also be used.

Conduit 156 can also include a flow control member 170, shown in FIG. 13, mounted to second end 160 to prevent the flow of cleaning agent therethrough when disconnected from chemical  
10 dispenser 60. Flow control member 170 preferably includes a connector (quick-disconnect coupling) that includes a shut-off valve that is actuated when disconnected from chemical dispenser 60 to seal container 152 and prevent the out flow of cleaning  
15 agent therefrom. Chemical dispenser 60 preferably includes a connector 172, shown attached to a section of conduit 174, that cooperates with connector/flow control member 170 to facilitate the quick connection of cleaner cartridge 150 thereto. One suitable  
20 arrangement for connector/flow control member 170 attached to second end 160 of conduit 156 and the cooperating connector 172 are coupling insert PLCD2200612 and coupling body PLCD1700412 manufactured by Colder Products Company of St. Paul,  
25 Minnesota. Other types of flow control members 170 can also be installed at second end 160 of conduit 156 to seal interior cavity 154 of container 152 such as a valve, a metering device, a clamp, a membrane, or a cap.



-23-

In accordance with one embodiment of the invention, cleaner cartridge 150 includes a housing 180, shown in FIG. 14, that can enclose container 152, conduit 156 and connector/flow control member 170. Housing 180 provides protection and support to container 152, which is particularly useful when container 152 is in the form of a collapsible bag. Housing 180 is preferably made from a single piece of rigid or semi-rigid material, such as plastic, cardboard and/or metal that is folded to form a box, which is preferably glued shut at, for example, tab 182. In accordance with a preferred embodiment, housing 180 is formed of corrugated plastic or cardboard.

Housing 180 also includes openings 184 and 186 on at least one side wall 188 that are preferably defined by removable portions 190 and 192, respectively. Portions 190 and 192 have perforated edges 194 and 196, which facilitate their easy removal to expose openings 184 and 186. Housing 180 can also include apertures 198 and 200 to provide finger access to further simplify the removal of portions 190 and 192. Opening 184 generally provides visual access to container 152 and allows a user to assess the volume of cleaning agent contained therein. Opening 186, in addition to providing visual access to container 152, also provides access to conduit 156 and connector/flow control member 170 for connection to chemical dispenser 60. In accordance with one

-24-

embodiment, opening 190 and removable portion 192 can also be formed on bottom 202 through which conduit 156 can extend for efficient dispensing of the cleaning solution in container 152, as shown in FIG.

5 13. Other openings can also be provided in housing 180 as desired.

Cleaner cartridge 150 is preferably removably receivable in a cartridge receiver 204 of cleaner 10, shown in FIG. 15. In accordance with one embodiment, 10 cartridge receiver 204 is a bracket having a back plate 206, opposing side walls 208 and 210, a front wall 212, and a bottom 214. Back plate 206 is mountable to a wall of cleaner 10 to position cleaner cartridge 150 proximate flow control device 72. 15 Bottom 214 and side wall 208 include an opening through which conduit 156 can extend for connection to chemical dispenser 60. Cartridge 150 can be secured to cartridge receiver 204 using a strap or other suitable means. Due to the limited jostling 20 that occurs during cleaning operations, such securing devices are typically unnecessary. It is understood by those skilled in the art that cartridge receiver 204 can take on many other forms to facilitate removably mounting cartridge 150 to cleaner 10, such 25 as a hook and loop, a clamp, and other suitable means. Multiple cleaner cartridges 150 and corresponding cartridge receivers 204 can be provided proximate their corresponding chemical dispensers 60

-25-

to accommodate the multiple chemical dispenser embodiment of the invention.

In operation, cleaner cartridge 150 is provided and a supply of cleaning agent is stored in interior  
5 cavity 154 of container 152. Next, second end 160 of conduit 156 is coupled to chemical dispenser 60 and cartridge 150 is installed in cartridge receiver 204. Chemical dispenser 60 can then receive the supply of cleaning agent through conduit 156 and provide a  
10 controlled output flow 74 of cleaning agent, as discussed above. When container 152 is collapsible, container 152 collapses in response to the output flow 74 of cleaning agent.

As described in greater detail below, the  
15 cleaning liquid can be aerated to create a foam-like aerated cleaning liquid that is delivered to the hard floor surface and utilized in the scrubbing process. The foam-like aerated cleaning liquid facilitates an efficient wetting of the floor surface. The preferred  
20 surfactant mentioned above can be used without additional additives to provide the desired foaming of the cleaning liquid. In general, the cleaning operation of this embodiment of the invention involves aerating the cleaning liquid into a foam-  
25 like aerated cleaning liquid (foamed cleaning liquid), applying the foamed cleaning liquid to the hard floor surface, working the foamed cleaning liquid with the scrub head 20, and substantially de-aerating the foamed cleaning liquid prior to

-26-

recovering the soiled cleaning liquid with the recovery system. In operation, de-aeration of the aerated cleaning liquid is rapidly achieved during contact with scrubbing member 22. As a result,  
5 relatively little foam is transferred into the recovery tank 12 by the recovery system.

Referring to FIGS. 6-8 and 10, a cleaning liquid aerator for generating the foamed cleaning liquid for application to the hard floor surface during a  
10 scrubbing process according to the present invention is generally indicated at 220. Aerator 220 may include a variety of foam generation devices, including but not limited to, pressurized air and/or pressurized liquid systems, agitation systems, etc.  
15 In accordance with one embodiment, aerator 220 is disposed on the housing above scrubbing head 20 and includes an air system 222 for pressurizing air that is mixed with the flow 64 of cleaning liquid from dispensing system 62 in a first fluid mixing member  
20 224. The mixed air and cleaning liquid can then be provided to a second fluid mixing member 226 for further mixing. A fluid distributor 66 directs the foamed aerated cleaning liquid generated by the mixing members 224 and 226 to the hard floor surface  
25 or other component of cleaner 10. The volume flow rate of the foamed aerated cleaning liquid delivered through fluid distributor 66 is substantially controlled by the volume flow rate of flow 64 of

-27-

cleaning liquid and, thus, the cleaning liquid dispensing system 62.

The air system 222 for generating and conveying pressurized air includes an air pump 228, a check  
5 valve 230, and associated fluid conduit sections 232 and 234. Suitable types of air pumps 228 include piston, diaphragm or rotary vane pumps. One preferred air pump 228 is a piston pump model number 22D1180-206-1002 manufactured by Gast Manufacturing, Inc., of  
10 Benton Harbor, Michigan. Check valve 230 is provided for back flow prevention of cleaning liquid into the air pump 228. Check valves can also be positioned in line with dispensing system 62 to prevent the back flow of fluid therethrough. The pressure at the  
15 output of air pump 228 is greater than that at low pressure side 96 of flow restriction member 86, such as approximately 40 psi.

The first mixing element 224 receives pressurized air from the air pump 228 via conduit  
20 section 234 and pressurized cleaning solution from cleaning liquid dispensing system 62 via conduit section 236. The first mixing element 224 (Y-coupling), has a pair of inlet ports 238 and 240 and an outlet port 242 through which the mixture is  
25 discharged. First mixing element 224 may be alternatively configured, but should include at least a pair of inlet ports for pressurized air and pressurized cleaning liquid and an outlet port for discharging the mixture. First mixing element 224

-28-

may be defined as a passive mixing element. An alternative first mixing element may include active mixing devices, such as energized impeller.

The outlet port 242 of the first mixing element 5 224 can be coupled to an electric solenoid valve (not shown) that is in line with conduit 244 to control the flow of fluid to the second mixing element 226 and to fluid distributor 66. Said valve could be operable between an open position in which solution 10 is permitted to flow out of the first mixing element 224 and a closed position in which solution flow is blocked. Alternative valves may be used to control the flow of fluid within the system, such as a variable output valve or other suitable component.

15 The second mixing element 226 receives and further mixes the pressurized air and cleaning liquid from the first mixing element 224. Second mixing element 226 can be a passive element including a relatively rigid receiver 246 having an inlet port 20 248 and an outlet port 250. A diffusion medium 252 is contained within the receiver 246. The diffusion medium 252 is capable of producing foam by shearing action, air entrainment or a combination of both. In a preferred embodiment, the diffusion medium 252 25 includes a plurality of SCOTCH-BRITE brand copper pads, manufactured by Minnesota Mining and Manufacturing Company of St. Paul, Minnesota. Alternative diffusion media may also be practicable,

-29-

including but not limited to glass beads, foams, and other porous substrates.

The length and diameter of the receiver 246 as well as structure of the diffusion medium 252, are sized so as to maintain the operating pressure of the system 220 at a desired level. The diffusion medium 252 and receiver 246 size affect the quality of the foam generated in the second mixing element 226. More particularly, using coarser diffusion medium 252 allows for easier passage of the foam through the receiver 246 since there are fewer contact, or blocking, points between medium 252 in the receiver 246. However, the coarser diffusion medium also results in larger foam bubbles. By using a sufficiently long receiver 246 with an appropriate diffusion medium 252, large foam bubbles formed near the upstream end of the receiver 246 will break down into more desirable smaller bubbles prior to reaching the downstream end of the receiver 246. As an example, the receiver 246 of the illustrated embodiment is about 9 inches long and has an inner diameter of approximately 2 inches.

The receiver 246 may be provided at an incline relative to the ground surface so that inlet port 248 is at a slightly lower elevation than outlet port 250. By so providing the inlet port 248 above the outlet port, the amount of aerated cleaning liquid delivered to the scrub brushes 22 after the valve controlling the flow therethrough has closed, may be

-30-

minimized. Various modifications and adaptations to the aerator 220 may be practicable.

The foamed cleaning liquid is discharged from the second mixing element 226 and directed toward the fluid distributor 66 via conduit section 254. Flow within conduit 254 is separated by a T-coupling 132 into conduits 258 and 160 of fluid distributor 66. The outlet of conduit sections 258 and 160 are provided above associated scrubbing member 22. During operation, the foamed cleaning liquid (or non-foamed cleaning liquid) is centrifuged out under the scrubbing member 22 in contact with the hard floor surface. Alternative approaches to aerated cleaning liquid delivery would be appreciated by those skilled in the relevant arts.

In operation, pressurized air and cleaning liquid is received into the first mixing element 224 and directed via conduit 244 through second mixing element 226. As the mixture of air and cleaning liquid flows through the diffusion medium 252 of the second mixing element 226, foam bubbles are generated. Foam output from the second mixing element 226 is discharged via conduit sections 254, 258 and 160 to the scrubbing medium 22.

Hard floor surface cleaner 10 generates a relatively wet foam as compared to carpet cleaners to provide the desired wetting of the hard floor surface. A foam's "dryness" may be defined in relation to this volumetric expansion ratio. A "dry"



-31-

foam has a higher expansion ratio as compared to a "wet" foam. High-expansion foams used in presently available types of carpet cleaning machines are actually relatively "dry" as the ratio of air to water is high. Dry foams are used in carpet cleaning to facilitate quick drying of the cleaned carpet. A "wet" foam is not typically used in carpet cleaning devices as these foams can cause excessive wetting of the carpet which may lead long drying times and mold development. In a particular embodiment, the ratio of volumes between the cleaning liquid (non-aerated) and the foamed cleaning liquid is approximately 1:8. For example, 0.15 gallons of cleaning liquid is aerated to occupy 1.25 gallons. Other volume ratios would yield acceptable scrubbing results.

As the cleaning machine 10 is moved forward, the foamed cleaning liquid is dispensed by fluid distributor 66 through conduit sections 258 and 160 at the front of the chassis and the scrubbing media 22 engage the foamed cleaning liquid and hard floor surface. The foamed cleaning liquid permits an efficient wetting of the hard floor surface, even at dramatically reduced cleaning liquid flow rates (e.g. 0.2 GPM). The process of mechanically working the foam with the scrubbing medium 22 results in substantial defoaming or de-aeration (up to 95% reduction in volume) of the foamed cleaning liquid prior to soiled solution recovery. In contrast, prior art devices using known chemical detergents may

-32-

create additional foam by the brush action, necessitating defoaming devices as mentioned herein.

A soiled solution of cleaning liquid and soil is developed by the interaction of the scrubbing medium  
5 22 in contact with the foamed cleaning liquid and the hard floor surface. The soiled solution includes partially de-aerated cleaning liquid and soil released from the hard floor surface. The soiled solution is recovered from the hard floor surface by  
10 recovery system 32 and conveyed to recovery tank 12.

The recovered soiled solution may be treated to reduce foam using various defoaming techniques, including an addition of defoaming chemical to the recovery tank 12. In the embodiment described  
15 herein, the soiled solution is substantially defoamed during the scrubbing process. The above referenced particular surfactant beneficially yields a foamed cleaning solution which rapidly de-aerates after contact with the rotating scrub brushes 22. As a  
20 result, in a preferred embodiment no additional defoaming devices or chemicals are required.

The scrubber 10 may include a defoaming device or system to reduce the volume of the collected soiled solution. The defoaming device or system may  
25 be part of the soiled solution collection and handling device 32 or may be disposed in relation to the soiled solution tank 12. The defoaming device or system may include a chemical defoaming system for applying a defoaming chemical to collected foam. The

-33-

defoaming device may include an acoustic and/or mechanical defoaming device.

Additional aspects of the present invention will be addressed. Regarding the foam system, alternative  
5 foam generation systems may be practicable. In the above described embodiment of aeration system 220, a compressed air and pressurized cleaning liquid process is utilized. Other means for generating the foam-like aerated cleaning liquid may be utilized.  
10 One such alternative aeration system utilizes an agitation process. The agitation process uses a mechanical device, such as a rotating impeller, to engage and entrain air within a solution. U.S. Pat. Nos. 3,761,987 and 3,931,662 each disclose an  
15 agitation-type foam generator, the disclosures of which are incorporated by reference herein.

Fluid distribution of the aerated cleaning liquid may include alternative structures. For example, the aerated or non-aerated cleaning liquid  
20 may be sprayed on the hard floor surface or scrubbing medium 22 or both. The aerated or non-aerated cleaning liquid may be delivered through the scrubbing medium 22, such as via apertures in the scrubbing medium 22, and/or applied directly to the  
25 floor surface in front of scrubbing medium 22. Distribution of aerated and non-aerated cleaning liquid may include a selective application to the hard floor surface, the brushes, or both.

-34-

Alternative distribution systems may be appreciated by those skilled in the relevant art.

Although the present invention has been described with reference to preferred embodiments,  
5 workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

-35-

WHAT IS CLAIMED IS:

1. A cleaner cartridge for containing a supply of cleaning agent for use in a hard floor surface cleaner having a chemical dispenser, the cleaner cartridge comprising:
  - a container having an interior cavity; and
  - conduit having a first end fluidically coupled to the interior cavity and a second end connectable to the chemical dispenser.
2. The cleaner cartridge of claim 1 including a flow control member mounted to the conduit and controlling a flow of fluid therethrough.
3. The cleaner cartridge of claim 1 including a seal between the first end of the conduit and the container.
4. The cleaner cartridge of claim 1, wherein the container is collapsible.
5. The cleaner cartridge of claim 1, wherein the container is formed of a clear, opaque, or translucent material.
6. The cleaner cartridge of claim 1 including a housing enclosing the container.
7. The cleaner cartridge of claim 6, wherein the housing includes an opening through which the second end of the conduit extends.
8. The cleaner cartridge of claim 6, wherein the housing includes a side wall having an opening through which the container can be viewed.

-36-

9. The cleaner cartridge of claim 6, wherein the housing includes at least one side having a removable portion that defines an opening through which the conduit can extend for coupling to the dispenser.
10. The cleaner cartridge of claim 1, including a cleaning agent contained in the interior cavity of the container.
11. A hard floor surface cleaner comprising:
  - a cartridge receiver;
  - a cleaner cartridge removably received by the cartridge receiver, the cleaner cartridge including:
    - a container having an interior cavity containing a supply of cleaning agent;
    - and
    - conduit having a first end fluidically coupled to the interior cavity;
  - a primary cleaning liquid component dispenser having an output flow of primary cleaning liquid component; and
  - a chemical dispenser including:
    - a flow control device coupled to a second end of the conduit and in fluid communication with the cleaning agent and a flow of the cleaning agent therethrough; and
    - a fluid mixing member receiving the flows of the cleaning agent and the primary cleaning liquid component, the fluid

-37-

mixing member having an output flow of cleaning liquid, which is a combination of the cleaning agent and the primary cleaning liquid component.

12. The hard floor surface cleaner of claim 11, wherein the container is collapsible.

13. The hard floor surface cleaner of claim 11, wherein the container is formed of a clear, opaque, or translucent material.

14. The hard floor surface cleaner of claim 11 including a housing enclosing the container.

15. The hard floor surface cleaner of claim 14, wherein the housing includes an opening through which the second end of the conduit extends.

16. The hard floor surface cleaner of claim 14, wherein the housing includes at least one side having a removable portion.

17. The hard floor surface cleaner of claim 11, including a cleaning agent contained in the interior cavity of the container.

18. The hard floor surface cleaner of claim 11 including:

an aerator in fluid communication with the flow of cleaning liquid, the aerator converting the cleaning liquid to a foam-like aerated cleaning liquid;

a fluid distributor directing the foam-like aerated cleaning liquid onto a hard floor surface;

-38-

- a scrubbing member engaging the hard floor surface and the foam-like aerated cleaning liquid; and
- a fluid recovery device downstream of the scrubbing member, the fluid recovery device removing at least a portion of the foam-like aerated cleaning liquid from the hard floor surface.



**AMENDED CLAIMS**

**[received by the International Bureau on 13 January 2003 (13.01.03)  
claim 4 and 12 deleted; claims 1, 3, 8, 10, 11, 13, 14, 17 amended (4 pages)]**

1. A cleaner cartridge for containing a supply of cleaning agent for use in a hard floor surface cleaner having a chemical dispenser, the cleaner cartridge comprising:

a collapsible bag having an interior cavity;  
and

conduit having a first end fluidically coupled to the interior cavity and a second end connectable to the chemical dispenser.

2. The cleaner cartridge of claim 1 including a flow control member mounted to the conduit and controlling a flow of fluid therethrough.

3. The cleaner cartridge of claim 1 including a seal between the first end of the conduit and the collapsible bag.

4. The cleaner cartridge of claim 1, wherein the collapsible bag is formed of a clear, opaque, or translucent material.

5. The cleaner cartridge of claim 1 including a housing enclosing the collapsible bag.

6. The cleaner cartridge of claim 5, wherein the housing includes an opening through which the second end of the conduit extends.

7. The cleaner cartridge of claim 5, wherein the housing includes a side wall having an opening through which the collapsible bag can be viewed.

8. The cleaner cartridge of claim 5, wherein the housing includes at least one side having a removable

- 40 -

portion that defines an opening through which the conduit can extend for coupling to the dispenser.

9. The cleaner cartridge of claim 1, including a cleaning agent contained in the interior cavity of the collapsible bag.

10. A hard floor surface cleaner comprising:

- a cartridge receiver;

- a cleaner cartridge removably received by the cartridge receiver, the cleaner cartridge including:

- a collapsible bag having an interior cavity containing a supply of cleaning agent;
  - and

- conduit having a first end fluidically coupled to the interior cavity;

- a primary cleaning liquid component dispenser having an output flow of primary cleaning liquid component; and

- a chemical dispenser including:

- a flow control device coupled to a second end of the conduit and in fluid communication with the cleaning agent and a flow of the cleaning agent therethrough; and

- a fluid mixing member receiving the flows of the cleaning agent and the primary cleaning liquid component, the fluid mixing member having an output flow of cleaning liquid, which is a

- 41 -

combination of the cleaning agent and  
the primary cleaning liquid component.

11. The hard floor surface cleaner of claim 10,  
wherein the collapsible bag is formed of a clear,  
opaque, or translucent material.

12. The hard floor surface cleaner of claim 10  
including a housing enclosing the collapsible bag.

13. The hard floor surface cleaner of claim 12,  
wherein the housing includes an opening through which  
the second end of the conduit extends.

14. The hard floor surface cleaner of claim 12,  
wherein the housing includes at least one side having  
a removable portion.

15. The hard floor surface cleaner of claim 10,  
including a cleaning agent contained in the interior  
cavity of the collapsible bag.

16. The hard floor surface cleaner of claim 10  
including:

an aerator in fluid communication with the flow  
of cleaning liquid, the aerator converting  
the cleaning liquid to a foam-like aerated  
cleaning liquid;

a fluid distributor directing the foam-like  
aerated cleaning liquid onto a hard floor  
surface;

a scrubbing member engaging the hard floor  
surface and the foam-like aerated cleaning  
liquid; and

- 42 -

a fluid recovery device downstream of the scrubbing member, the fluid recovery device removing at least a portion of the foam-like aerated cleaning liquid from the hard floor surface.




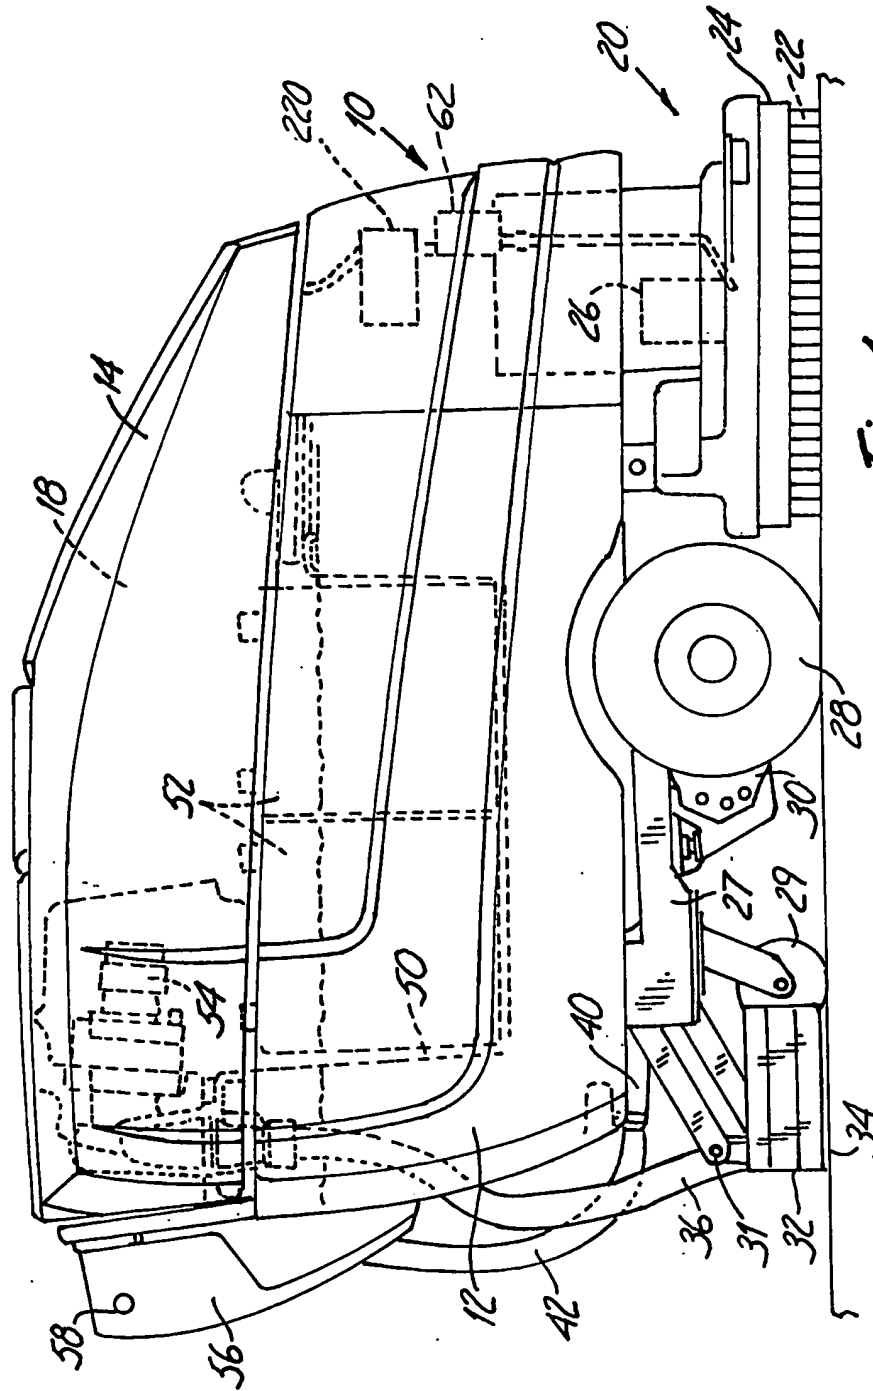



Fig. 1

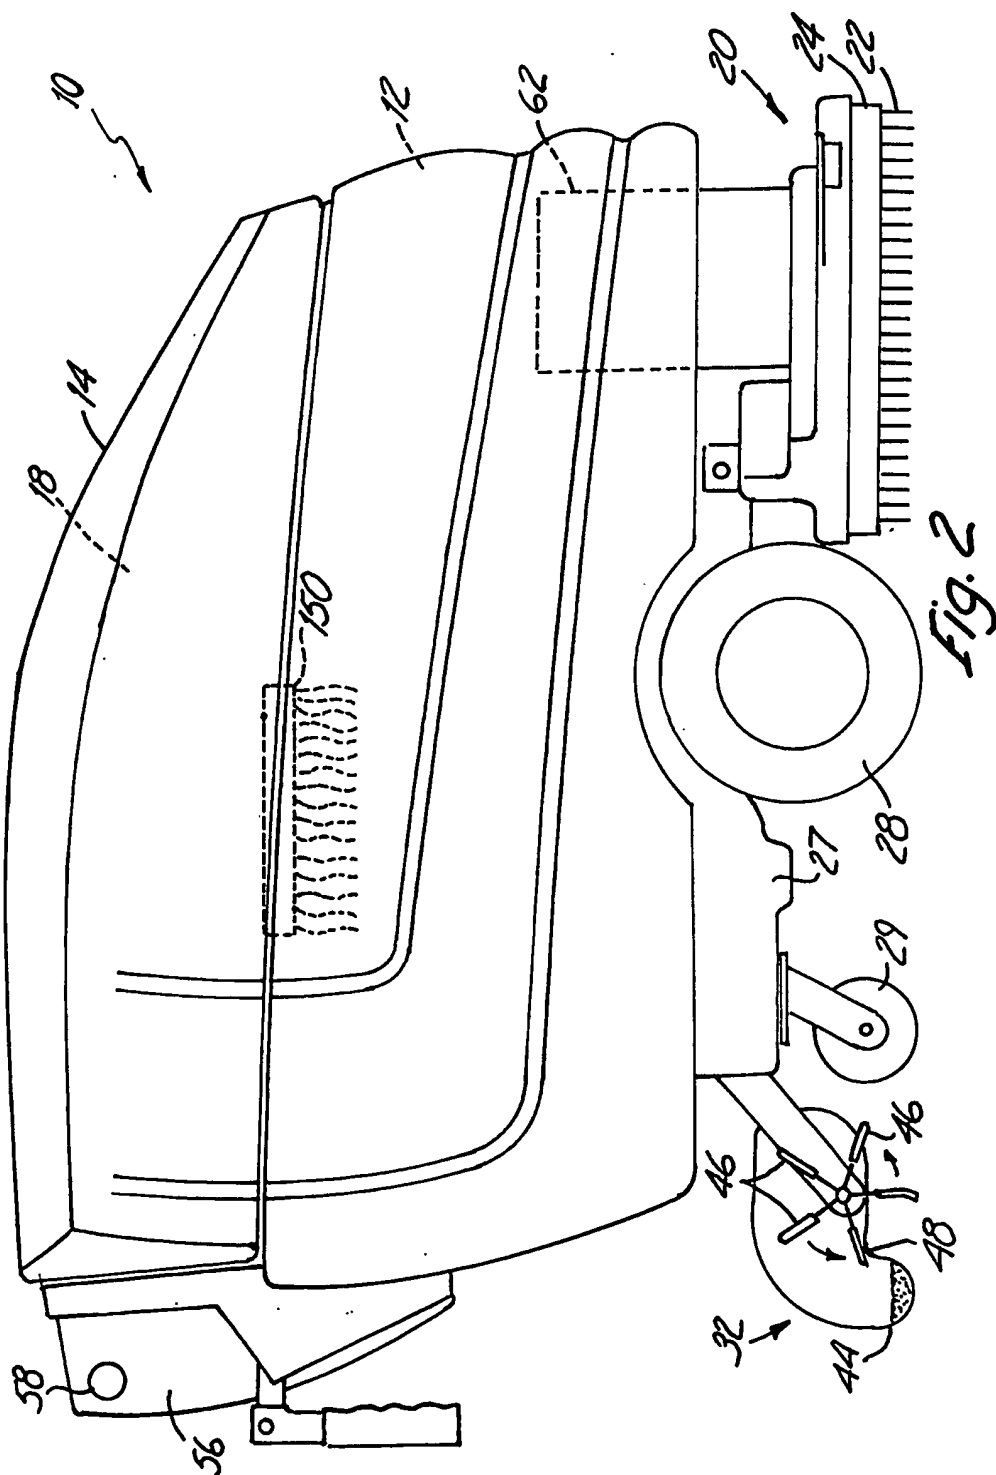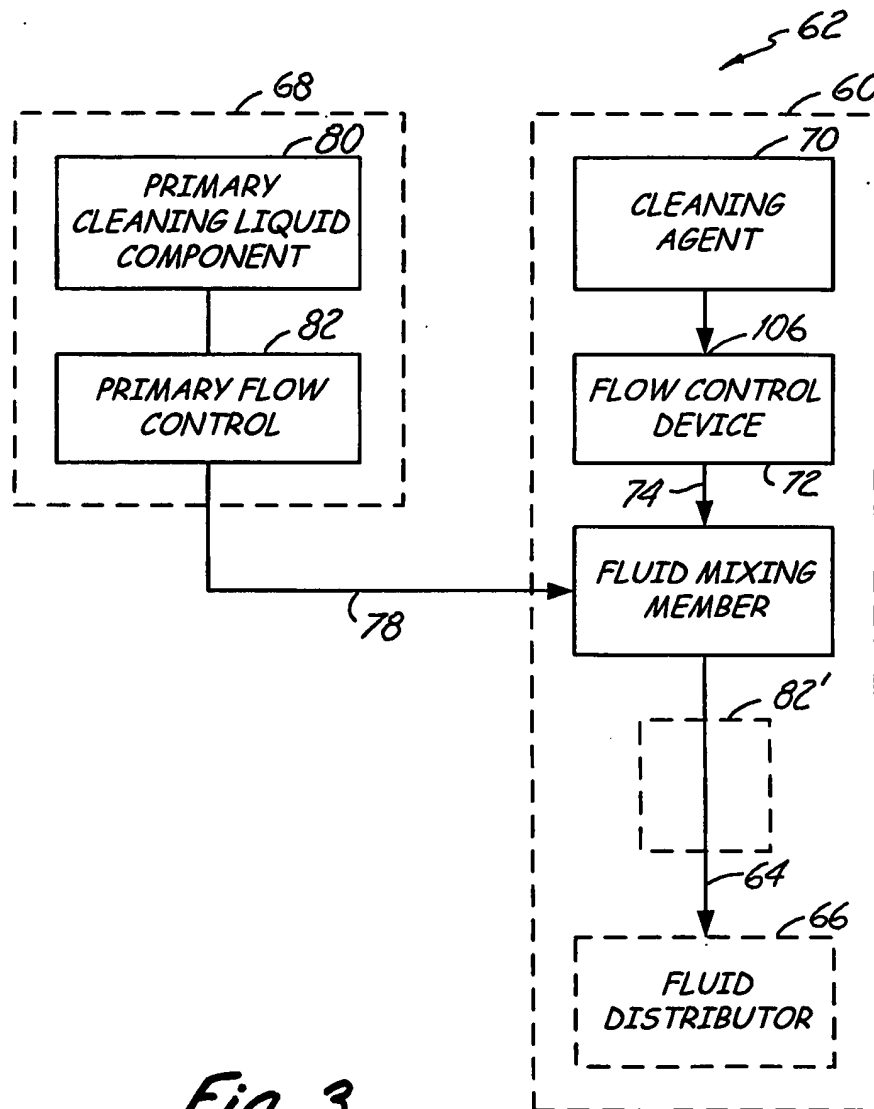



*Fig. 3*

*Fig. 4*

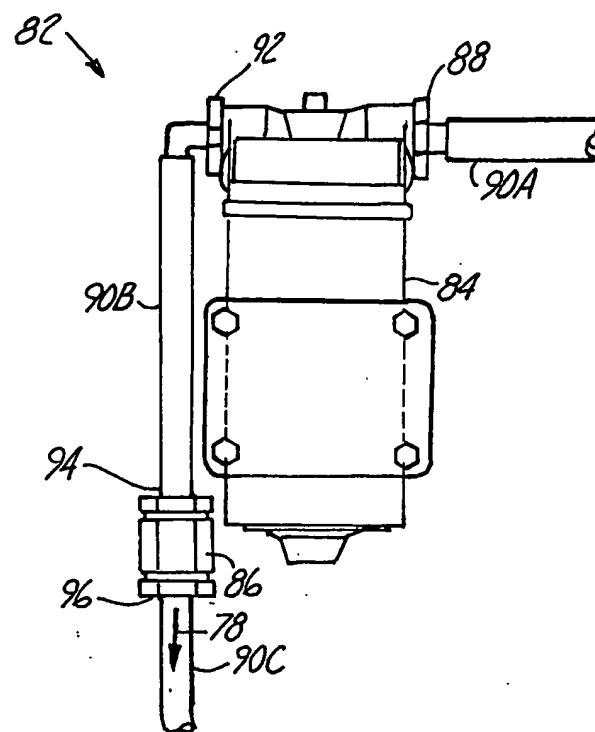

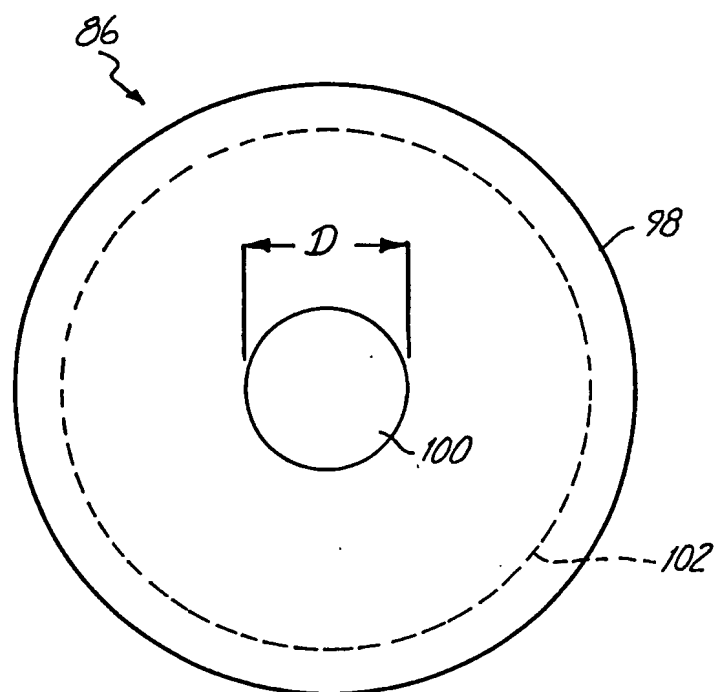*Fig. 5*

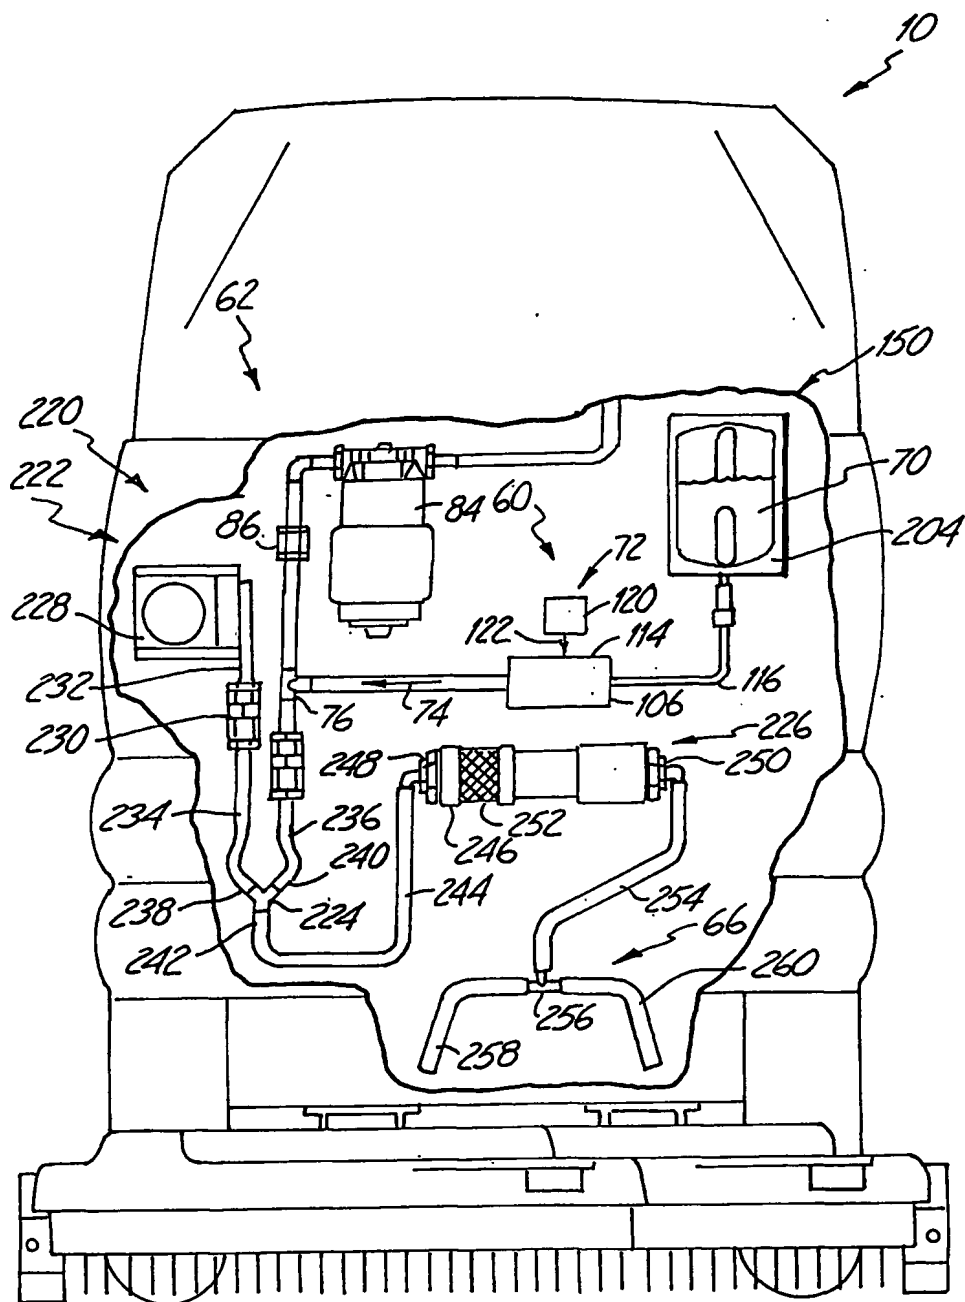*Fig. 6*

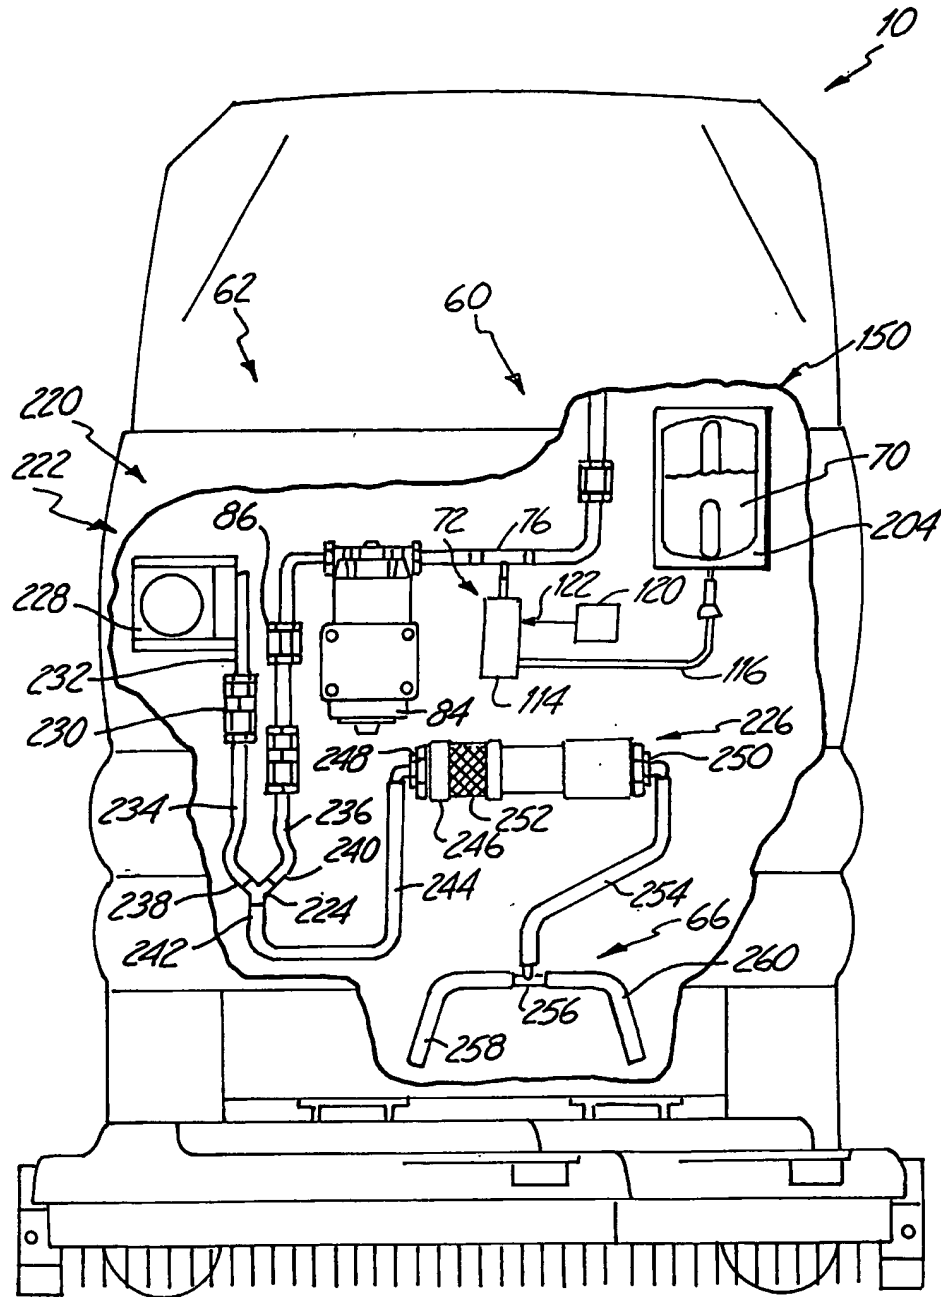*Fig. 7*




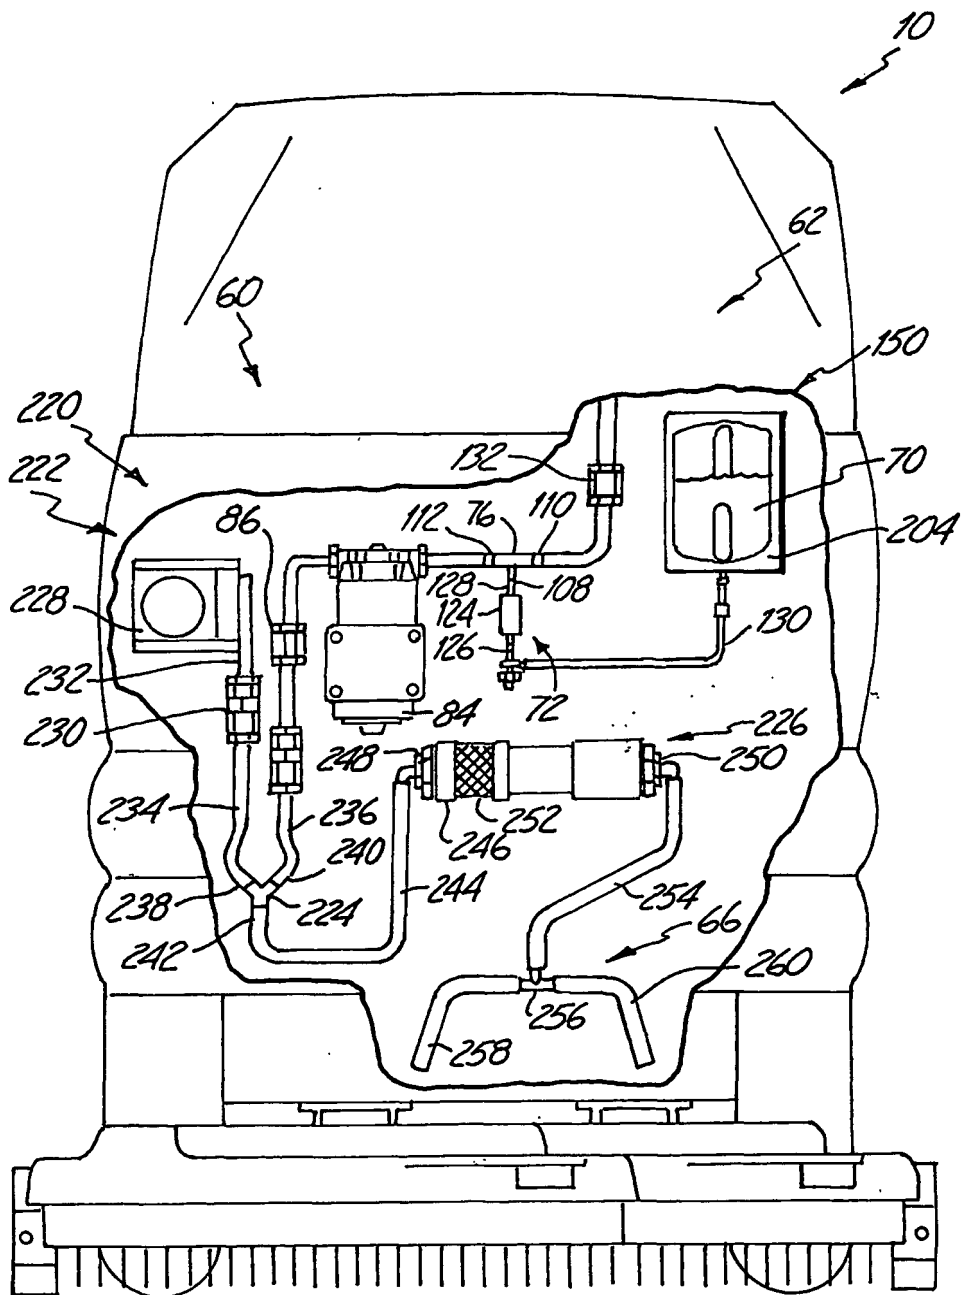


Fig. 8

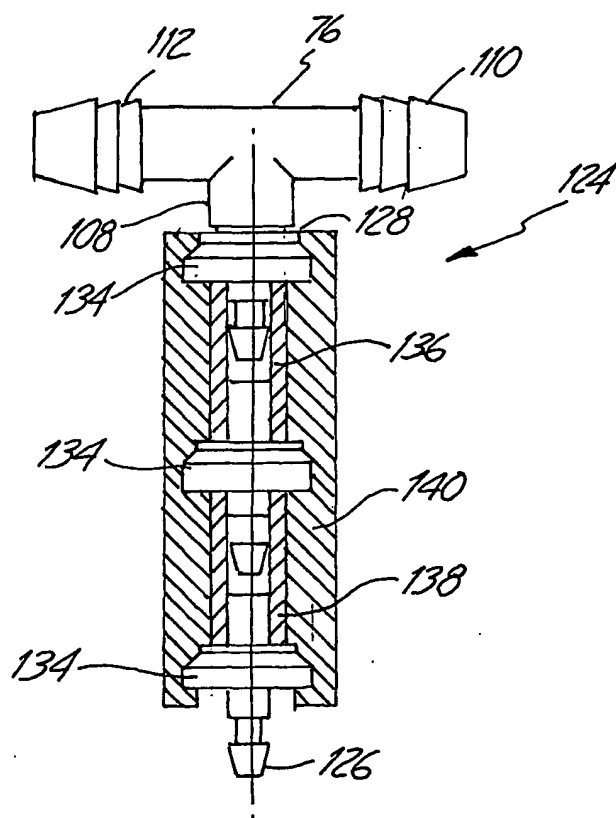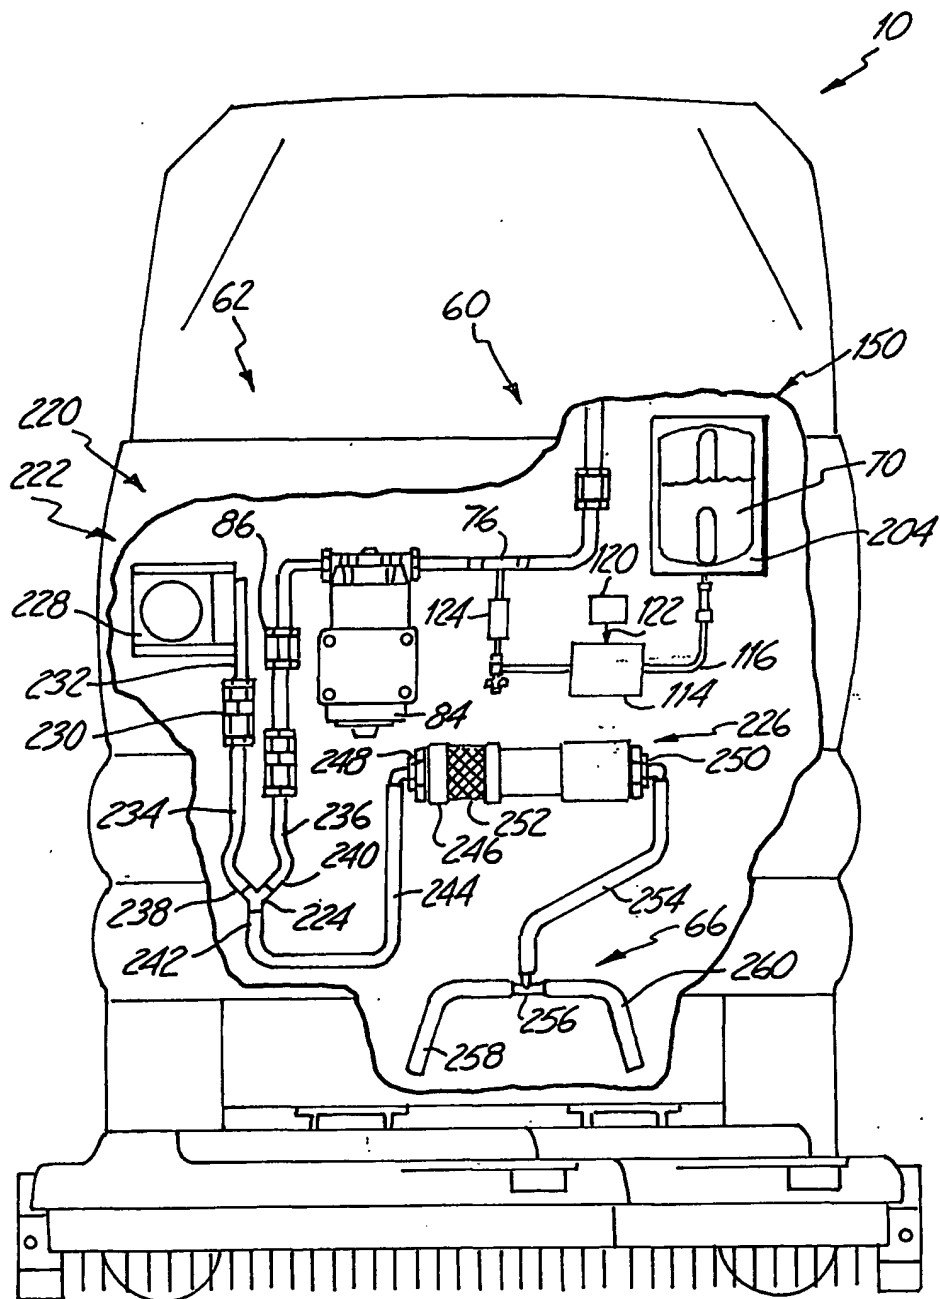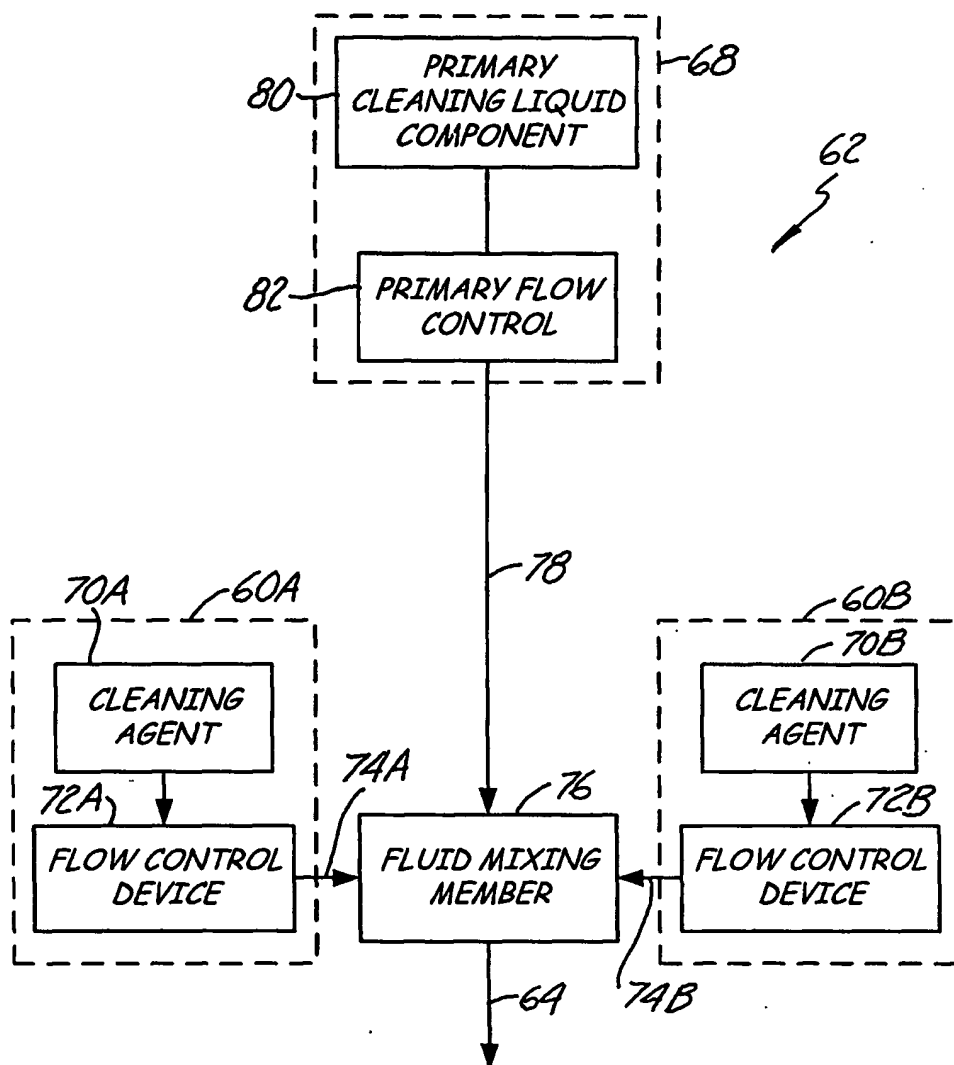

*Fig. 9*

*Fig. 10*

*Fig. 11*




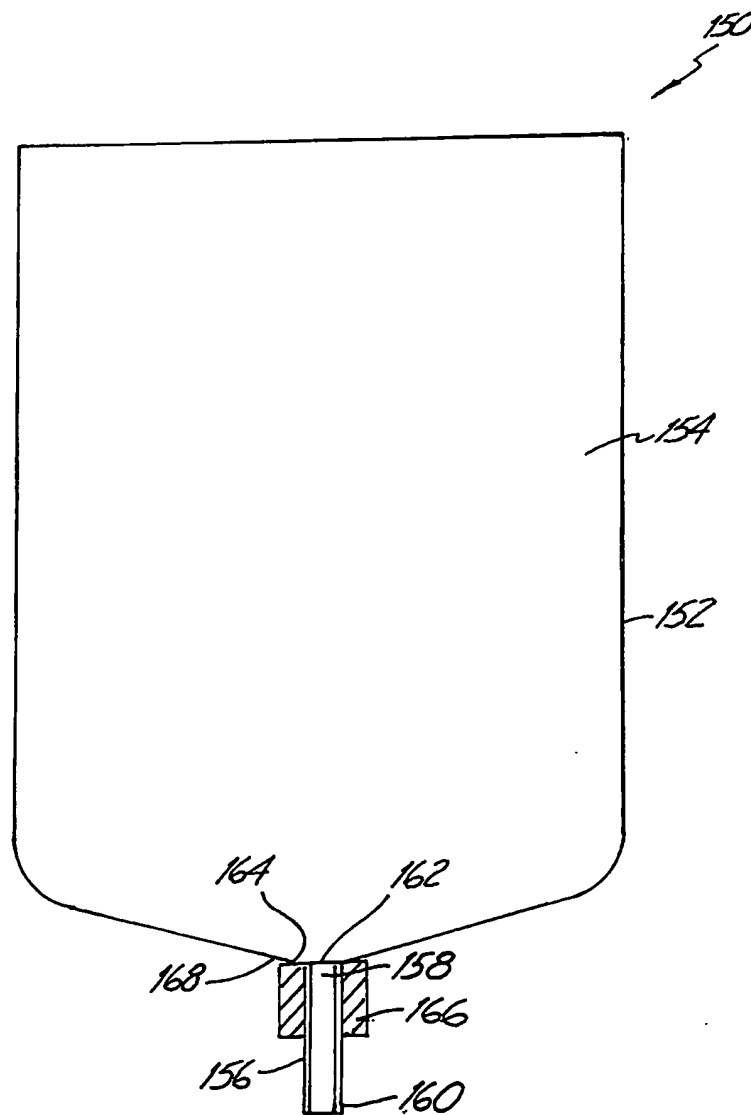


Fig. 12

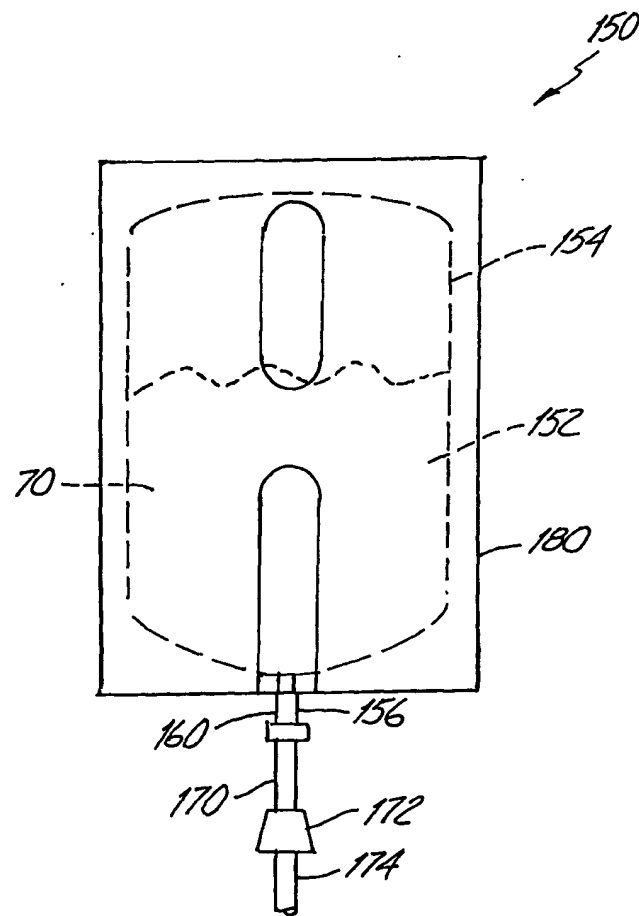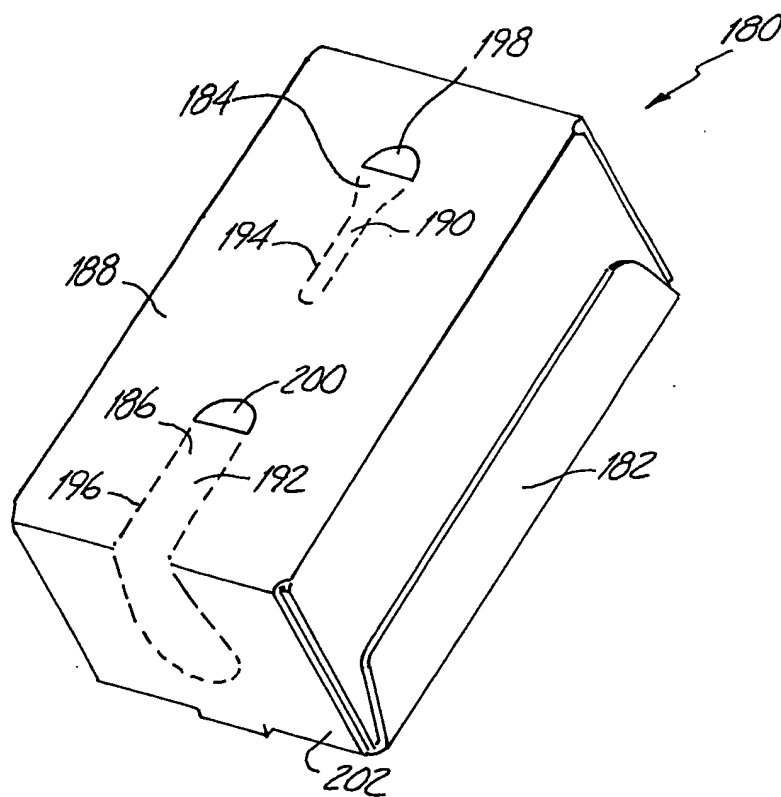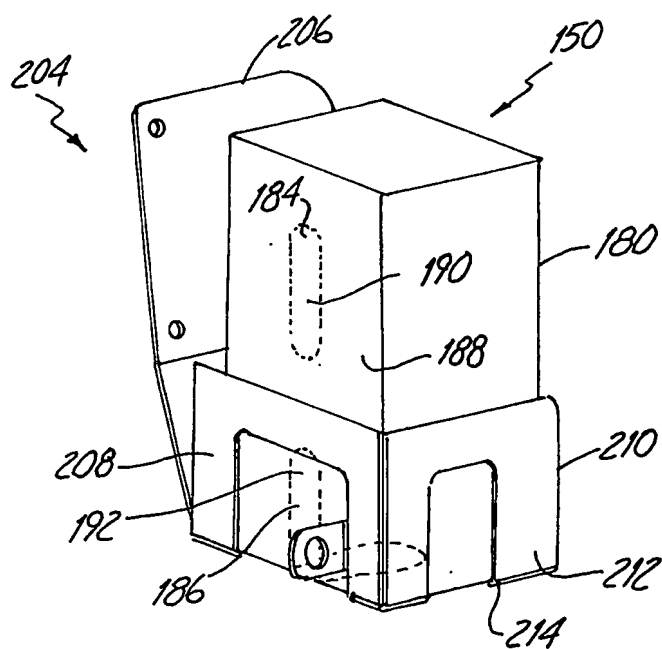

*Fig. 13*

*Fig. 14*

*Fig. 15*

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/23758

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A47L11/03 A47L11/29 B65D77/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A47L B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 667 364 A (MEILI H) 26 May 1987 (1987-05-26) abstract column 1, line 4 - line 9 column 2, line 23 - line 28 column 2, line 65 - column 3, line 3 column 3, line 30 - line 37 column 3, line 49 - line 53 figures	1-3, 10, 11, 17
X	DE 44 13 783 A (HENKEL ECOLAB & CO OG H) 2 March 1995 (1995-03-02) abstract column 1, line 16 - line 26 column 3, line 66 - column 4, line 42 figures	1-3, 10
A	---	11
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

6 November 2002

Date of mailing of the international search report

14/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Cabral Matos, A

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/23758

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 676 287 A (FITZWATER E) 30 June 1987 (1987-06-30)  abstract column 2, line 21 - line 24 column 3, line 35 - line 56 column 10, line 9 - line 25 figures 2,18,22  ---	1-3,5, 10,11, 13,17
A	US 3 761 987 A (NAYFA J ET AL) 2 October 1973 (1973-10-02) cited in the application abstract column 6, line 57 -column 7, line 35 figures 8,9,11-13  ---	18
A	US 6 209 756 B1 (VAN DER HEIJDEN LAMBERTUS GERA) 3 April 2001 (2001-04-03) abstract column 3, line 24 - line 54 column 3, line 66 -column 4, line 31 column 4, line 54 - line 56 figures 1-8,12  ---	1-4,6,7, 9
A	US 5 649 643 A (RIDGEWAY DONNA) 22 July 1997 (1997-07-22) abstract column 5, line 2 - line 6 column 6, line 29 - line 31 figure 8  -----	1,5,8

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/23758

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4667364	A	26-05-1987	AT 57602 T	15-11-1990
			CA 1259764 A1	26-09-1989
			DE 3580219 D1	29-11-1990
			EP 0173392 A2	05-03-1986
			JP 1701578 C	14-10-1992
			JP 3068686 B	29-10-1991
			JP 61068912 A	09-04-1986
DE 4413783	A	02-03-1995	DE 4413783 A1	02-03-1995
			CA 2170865 A1	09-03-1995
			WO 9506427 A1	09-03-1995
			EP 0716576 A1	19-06-1996
			FI 960952 A	29-02-1996
			JP 9501853 T	25-02-1997
			NO 960197 A	07-03-1996
US 4676287	A	30-06-1987	AT 67082 T	15-09-1991
			AT 121918 T	15-05-1995
			AT 118324 T	15-03-1995
			AU 3671884 A	24-09-1985
			CA 1269210 A1	22-05-1990
			CA 1302357 A2	02-06-1992
			DE 3485060 D1	17-10-1991
			DE 3486370 D1	23-03-1995
			DE 3486370 T2	14-06-1995
			DE 3486386 D1	08-06-1995
			DE 3486386 T2	25-01-1996
			EP 0174312 A1	19-03-1986
			EP 0404278 A2	27-12-1990
			EP 0404279 A2	27-12-1990
			WO 8503853 A1	12-09-1985
US 3761987	A	02-10-1973	US 3931662 A	13-01-1976
			US 3961392 A	08-06-1976
			US 4000536 A	04-01-1977
US 6209756	B1	03-04-2001	AT 220634 T	15-08-2002
			AU 738634 B2	20-09-2001
			AU 5735599 A	27-03-2000
			BR 9913413 A	22-05-2001
			CA 2342239 A1	16-03-2000
			DE 69902180 D1	22-08-2002
			WO 0013987 A1	16-03-2000
			EP 1109731 A1	27-06-2001
			TR 200100604 T2	21-09-2001
US 5649643	A	22-07-1997	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ ~~FADED TEXT OR DRAWING~~
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**